CLASS 150 CAST STEEL BALL VALVE FLANGED ENDS


KITZ Fig: 150SCTDZ Sizes: 1/2-8inch(15-200mm)

ANTI-STATIC DEVICE, FULL BORE, CONFORM TO ISO5211

Standards

End to End: ASME B16.10 CLASS 150
End Connection: ASME B16.5 CLASS 150
Wall Thickness: ASME B16.34 CLASS 150

Test Standard . API 598

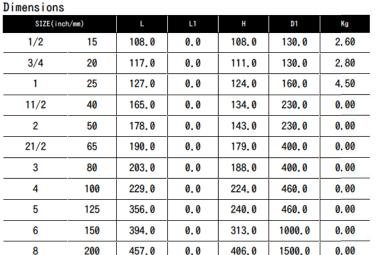



matoriat Erot		
NAME OF PART	MATERIAL	SPECIFICATION
BODY	CAST STEEL	A216 Gr.WCB/SCPH2
BODY CAP	CAST STEEL	A216 Gr. WCB/SCPH2
STEM	STAINLESS STEEL	3 04 SS
BALL	STAINLESS STEEL	A351 Gr. CF8/SCS13A

Specifications


CLASS 150 CAST STEEL BALL VALVE FLANGED ENDS, ANTI-STATIC

DEVICE, FULL BORE, CONFORM TO ISO5211

End to End: ASME B16.10 CLASS 150, End Connection: ASME B16.5 CLASS 150, Wall Tchickness: ASME B16.34 CLASS 150, Test Standard: API 598, Sizes: 1/2-8inch(15-200mm), BODYMATERIAL: CAST STEEL, BODY CAPMATERIAL: CAST STEEL, STEMMATERIAL: STAINLESS STEEL, BALLMATERIAL


:STAINLESS STEEL, KITZ Fig : 150SCTDZ









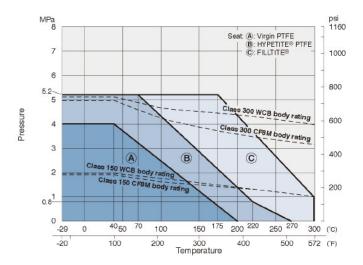

Pressure-temperature ratings and other performance data published in this catalog have been developed from our design talculation, in-house testing, field reports provided by our customers and/or published official standards or specifications. They are good only to cover typical applications as a general guideline to users of KITZ products introduced in this catalog. For any specific application, users are kindly requested to contact KITZ Corporation for technical advice, or to carry out their own study and evaluation for proving suitability of these products to such an application. Failure to follow this request could result in property damage and/or personal injury, for which we shall not be liable. Read instruction manual carefully before use.

