CLASS 125 FORGED BRASS, GATE VALVES

KITZ Fig: FH

Sizes: 21/2-inch(65-mm)
SCREWED ENDS. SCREWED BONNET, INSIDE SCREW, NON RISING STEM.
Standards
. End to End: KITZ STANDARD
. End Connection: JIS B0203
. Wall Thickness: KITZ STANDARD
Test Standard
. KITZ STANDARD
Conform to
鉛の浸出性能基準相当品（自社確認） 65-80 mm (21/2-3 inch)
approved

Dimensions

SIZE(inch/mm)		L	L1	H	D1	Kg
21/2	65	82.0		187.0	100.0	
3	80	92.0		205.0	115.0	

水

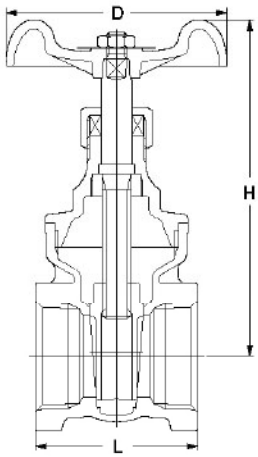

For more details, please refer to the drawing.

Material List

NAME OF PART	MATERIAL	SPECIFICATION
BODY	FORGED BRASS	C3771
BONNET	FORGED BRASS	C3771
STEM	BRASS	C3531(2)
DISC	FORGED BRASS	C3771

Specifications
CLASS 125 FORGED BRASS, GATE VALVES, SCREWED ENDS. SCREWED BONNET, INSIDE SCREW, NON RISING STEM.
End to End : KITZ STANDARD, End Connection : JIS B0203, Wall Tchickness : KITZ STANDARD, Test Standard : KITZ STANDARD, Sizes : 21/2-inch(65-mm), Conform to : 鉛の浸出性能基準相当品（自社確認） 65-80 mm (21/2-3 inch), BODYMATERIAL :FORGED BRASS, BONNETMATERIAL :FORGED BRASS, STEMMATERIAL :BRASS, DISCMATERIAL :FORGED BRASS, KITZ Fig : FH

Pressure-temperature ratings and other performance data published in this catalog have been developed from our design calculation, in-house testing, field reports provided by our customers and/or published official standards or specifications. They are good only to cover typical applications as a general guideline to users of KITZ products introduced in this catalog. For any specific application, users are kindly requested to contact KITZ Corporation for technical advice, or to carry out their own study and evaluation for proving suitability of these products to such an application. Failure to follow this request could result in property damage and/or personal injury, for which we shall not be liable. Read instruction manual carefully before use.

© KITZ Corporation. All Right Reserved.